

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Nicholas JORDAN  
Serial No.: NEW  
Filed: March 4, 2004  
For: FLAT FLEXIBLE CABLE

SUBMISSION OF PRIORITY DOCUMENT

Commissioner for Patents  
P. O. Box 1450  
Alexandria, VA 22313-1450


March 4, 2004

Sir:

In accordance with the provisions of 35 U.S.C. §119, Applicant hereby claims the benefit of the filing date of British Patent Application No. 0305228.9, filed March 7, 2003. A certified copy of the priority application is attached. The Examiner is respectfully requested to acknowledge Applicant's claim for priority, as well as receipt of the certified copy of the priority document.

Respectfully submitted,  
**LOWE HAUPTMAN GILMAN & BERNER, LLP**

By:

  
Allan M. Lowe, Reg. No. 19,641

1700 Diagonal Road, Suite 300  
Alexandria, VA 22314  
703-684-1111 telephone  
703-518-5499 telecopier  
AML:rk

Handwritten signature or initials, possibly "M. J. [unclear]" or similar, located in the lower center of the page.



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed 

Dated 11 February 2004



Patents 1977  
(Rule 16,



07MAR03 E790524-1 D01463  
P01/7700 0.00-0305228.9

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference	300200428-1 GB		
2. Patent application number (The Patent Office will fill in this part)	0305228.9		07 MAR 2003
3. Full name, address and postcode of the or of each applicant (underline all surnames)	Hewlett-Packard Development Company, L.P. 20555 S.H. 249 Houston, TX 77070 USA		
Patents ADP number (if you know it)			
If the applicant is a corporate body, give the country/state of its incorporation	Texas 08557 886001 HERB ALL 714103		
4. Title of the invention	A Flat Flexible Cable		
5. Name of your agent (if you have one)	David J. Marsh Hewlett-Packard Ltd, IP Section Filton Road, Stoke Gifford Bristol BS34 8QZ		
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)			
Patents ADP number (if you know it)	082 8 21 88001		
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application		Date of filing (day / month / year)
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:	Yes		
a) any applicant named in part 3 is not an inventor, or			
b) there is an inventor who is not named as an applicant, or			
c) any named applicant is a corporate body.			
See note (d))			

BEST AVAILABLE COPY

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form

Description

11 ✓

Claim(s)

4 ✓

Abstract

1 ✓

Drawing(s)

5 + 5 2 ✓

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

1 ✓

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

Fee Sheet ✓

11.

I/We request the grant of a patent on the basis of this application.

Signature

David J. Marsh

Date

6 March 03

12. Name and daytime telephone number of person to contact in the United Kingdom

Sue Holding Tel: 0117-312-9264

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

# **A Flat Flexible Cable**

- 5 This invention relates to a flat cable, in particular to a flat flexible cable. This invention further relates to method of manufacturing a flat flexible cable.

Conventional cables typically have a circular cross-sectional construction which results in a limited bend radius so that such cables are difficult to use in  
10 situations where the space available for the cable is limited or where the cable must negotiate a tight tortuous path, for example, in mobile telecommunication applications.

Coaxial cables are a good example of a conventional cable with a circular  
15 cross-section. A coaxial cable comprises a central conductor surrounded by an outer cylindrical conductor with an insulating material there between. The central conductor is usually in the form of a solid wire or a plurality of twisted strands of wire. The outer cylindrical conductor is usually in the form of a braided or foil sheet. Typically an outer sheath of insulation is supplied around  
20 the outer cylindrical conductor.

Coaxial cables are commonly used when it is necessary to shield an electrical signal for more effective transmission and prevent interference from external noise. The shielding structure of such coaxial cables enables the impedance  
25 along the cable to be controlled and maintained. The impedance is determined by the dielectric constant of the insulating material and the relative diameters of the central and outer cylindrical conductors. These properties can be varied to achieve the required impedance of a cable. To maintain a constant impedance along the entire length of the cable, the relative diameters of the central and

outer cylindrical conductors need to be constant throughout the length of the cable.

Coaxial cables are used as both signal and electrical interconnects and are typically used in the fields of telecommunications, cable television networks and local area ethernet networks.

It is an object of the present invention to seek to overcome at least one of the disadvantages of conventional cables of circular cross-section.

10

Accordingly, the present invention provides a flat flexible cable having an elongate composite structure comprising: an elongate region of conductive material; an insulative material surrounding the conductive material; first and second elongate flat conductors sandwiching the insulative material surrounding the elongate region of conductive material; and first and second elongate flat insulators on opposite sides of the first and second elongate flat conductors to the insulative material surrounding the conductive material, wherein the composite structure is itself flat and foldable without structural damage to the cable or its component parts.

20

Another aspect of the present invention provides a method of manufacturing a flat flexible cable having an elongate composite structure comprising: providing an elongate region of conductive material; forming a surround of insulative material around the conductive material; locating a first and a second flat conductor either side of the insulative material; providing a first and a second flat insulator on opposite sides of the first and second flat conductors to the insulative material surrounding the conductive material, wherein the composite structure is foldable without damage to the cable or its component parts.



In order that the present invention may be more readily understood, embodiments thereof will now be described, by way of example, with reference to the accompanying drawings in which:

5

Figure 1 is a cross-section through a perspective view of a flat cable having an elongate structure embodying the present invention;

10

Figure 2a is a cross-section through a perspective view of the flat cable of Figure 1 with further features;

Figure 2b is a cross-section through a perspective view of the flat cable of Figure 1 with further features;

15

Figure 2c is a cross-section through a perspective view of the flat cable of Figure 1 with further features;

20

Figure 3a is a cross-section through a perspective view of the flat cable of Figure 2a with further features;

Figure 3b is a cross-section through a perspective view of the flat cable of Figure 2a with further features;

25

Figure 3c is a cross-section through a perspective view of the flat cable of Figure 2a with further features;

Figure 4 is a cross-section through a perspective view of the flat cable of Figure 2c showing a reduced thickness in the first and fifth insulating layers at preselected regions along the cable;

Figure 5 is a plan view of a length of cable embodying the present invention folded to conform to a required path;

- 5 Figure 6 is a plan view of a terminated cable embodying the present invention formed to conform to a required path;

Figure 7 is a cross-sectional view of a flat cable embodying the present invention;

10

Figure 8 is a detail of the cross-sectional view of Figure 7 with the flat cable being formed with a terminal arrangement; and

- Figure 9 is a cross-section through a perspective view of the flat cable of Figure  
15 2c showing a terminal arrangement.

A flat cable having an elongate structure is shown in Figure 1. The flat cable structure is flexible meaning that it can be bent or folded preferably at least through 90° and back on itself without structural damage to the cable or its  
20 component parts

The flat cable illustrated in the present Application is a coaxial cable. A coaxial cable has a central conductive core, a surrounding insulative core, an outer conductive screen and an outer insulative sheath. It should be appreciated that  
25 the invention is not limited to flat coaxial cables but also encompasses flat non-coaxial cables and any other suitable flat cable structures.

In the example shown in Figure 1, the flat cable 1 structure is divided into a multitude of elongate planar layers. The first layer is a first insulative layer 2

composed of an insulative material which is for example polyamide or polyester or any other suitable insulative material. The first insulative layer comprises a part of an outer insulative sheath. The second layer is a first conductive layer 3, positioned adjacent to the first insulating layer 2, in the form of a solid foil or mesh which forms part of an outer conductive screen.

The third layer is a second insulative layer 4, laid adjacent to the first conductive layer 3, composed of an insulative material with dielectric properties that provide the necessary propagation characteristics such as a polyamide or polyester. Such insulative material is preferably the same insulative material as the first insulative layer 2 or any other suitable insulative material. The third layer forms part of an insulative core.

The fourth layer is composed of an elongate conductive region 5 positioned adjacent to the second insulative layer 4 and having a width less than the width of the second insulative layer 4, and a pair of insulative strips 6 located on either side of the conductive region 5 and abutting the second insulative layer 4.

The conductive region 5 is a solid core, wire, mesh or combination thereof preferably of copper but could be of any other suitable conductive material. The insulative strips 6 are composed of an insulative material with dielectric properties that provide the necessary propagation characteristics such as a polyamide or polyester or any other suitable insulative material. Preferably, the insulative material of the insulative strips 6, is the same as the insulative material of the second insulative layers 4 or any other suitable insulative material.

The fifth layer of the flat cable 1 structure is a third insulative layer 7, laid adjacent to and upon the conductive region 5 and the insulative strips 6. The

third insulative layer 7 is composed of an insulative material with dielectric properties that provide the necessary propagation characteristics such as a polyamide or polyester or any other suitable insulative material. Preferably the insulative material is the same as the insulative material of the second insulative layer 4 and the insulative strips 6. Together with the second insulative layer 4 and the insulative strips 6, the third insulative layer 7 makes up an insulative core surrounding the conductive region 5.

The sixth layer of the structure is a second conductive layer 8 positioned adjacent to the fifth layer, in the form of a solid foil, plate or mesh forming another part of the outer conductive screen.

The seventh layer of the flat cable 1 structure is the fourth insulative layer 9, adjacent to the second conductive layer 8, which is composed of an insulative material. The insulative material is preferably the same as the insulative material of the first and/or second and/or third insulative layers 2,4,7 and/or insulative strips 6 or any other suitable material. The fourth insulative layer 9 comprises a part of the outer insulative sheath.

Referring to Figure 2a, a first conductive portion 10 is positioned adjacent to the longitudinal common sides of the second, third, fourth, fifth and sixth layers of the flat cable 1 structure, thereby electrically interconnecting the first and second conductive layers 3,8. Similarly, a second conductive portion 11 is positioned adjacent to the longitudinal common sides of the second, third, fourth, fifth and sixth layers of the structure, on the opposite side to the first conductive portion 10, electrically interconnecting the first and second conductive layers 3, 8. Therefore, the first and second conductive layers 3, 8 and the first and second conductive portions 10,11 are electrically connected to one another and complete an outer conductive screen.

The first and second conductive portions 10,11 can be in the form of a solid foil, a sheet, a plate, a mesh or any combination thereof. In Figure 2a, the first and second conductive portions 10,11 are individual portions. However, it is envisaged that the third conductive layer 8 and at least one of the first and second conductive portions 10,11 are formed together as a single element. In Figure 2b, the first conductive layer 3 and the first and the second conductive portions 10,11 comprise a single element 12. In Figure 2c, the first and second conductive layers 3,8 and the first and second conductive portions 10,11 comprise a single element 13, thereby forming a continuous sheath. The single elements 12,13 can be in the form of a solid foil or a mesh.

As shown in Figure 3a, first and second insulative portions 14,15 are positioned adjacent to the first and second conductive portions 10,11 respectively. Each insulative portion 14,15 is in contact with the first and fourth insulative layers 2,9, thereby completing the outer insulative sheath. In Figure 3a, the first and second insulative portions 14,15 are individual portions. However, it is envisaged that the first insulative layer 2 and at least one of the first and second insulative portions 14,15 could comprise a single element. In Figure 3b, the first insulative layer 2 and the first and the second insulative portions 14,15 comprise a single element 16. In Figure 3c, the first and fourth insulative layers 2,9 and the first and second insulative portions 14,15 comprise a single element 17, thereby forming a continuous insulating sheath. In this form the flat cable 1 is a flat coaxial cable. The first and second insulative portions 14,15 and/or the single elements 16,17 are composed of an insulative material of preferably the same composition, as discussed above with relation to the first and the fourth insulative layers 2,9.

The assembled conductive and insulative layers and portions making up the cable structure have a combined thickness which is no more than in the order of 1mm and preferably less than 0.5mm. The combined thickness can be any suitable thickness which without preventing flexible folding of the cable structure will not cause structural damage to the cable or its component parts. In any case, in the event that the cable is a coaxial cable, the respective thicknesses of the layers between the first and second conductive layers 3,8 are selected to ensure constant impedance along the cable, the matched transmission system, and to ensure flexibility - i.e. the ability to fold.

10

To ensure a constant impedance along the entire structure of the flat cable 1, when configured as a co-axial cable, the thickness of the second and third insulative layers 4,7 must remain constant along the entire length of the flat cable 1. Thus, the distance between the conductive region 5 and the first and second conductive layers 3,8 are constant along the length of the cable. The widths of the insulative strips 6, on either side of the conductive region 5 do not have a substantial effect on the impedance of the cable 1.

15

To accommodate changes in direction in the cable path, the thickness of the first and/or fourth insulative layers 2,9 can be reduced at predetermined locations 18 along the length of the cable 1 to provide fold lines. Since the structure is flat and flexible, it is readily foldable to conform to a required cable path. The foldability of the cable, allowing the cable to bend or fold back on itself, enables the flat coaxial cable to follow a tight tortuous pathway for interconnection solutions where space is restricted. Changes in cable path direction within the same plane can be accommodated in two ways: either by folding the cable over at a desired angle to the longitudinal axis of the cable or by custom manufacturing the cable incorporating the desired changes of direction. For example, Figure 5 shows a cable which has been folded back on

20  
25

itself along a fold line at 45 degrees to the longitudinal axis of the cable so as to effect a change of direction of 90 degrees and Figure 6 shows a cable which has been manufactured to incorporate the same change in direction.

- 5 The folding characteristics of the flat flexible cable can be enhanced by incorporating preformed fold lines in the cable at pre-designated positions along the length of the cable. The fold lines comprise areas of reduced thickness - reduced thickness areas or lines being easier to fold. The first and fourth insulative layers 2,9 are the layers which are reduced in thickness at pre-  
10 designated positions 18 as shown in Figure 4.

It is envisaged that standard electrical conductors could be intercalated within at least one of the first and fourth insulative layers 2,9 and the first and second insulative portions 14,15. In Figure 7, flat conductors 19 have been intercalated  
15 within the first and second insulative portions 14,15. It would also be possible for a plurality of flat coaxial cables to be formed in a single flat cable each surrounded by a common outer insulative sheath.

Referring again to Figure 7, the first conductive layer 3 is provided as a  
20 substrate upon which are applied the second insulative layer 4, the conductive region 5, the insulative strips 6 and the third insulative layer 7 after which this structure of conductive region, strips and stacked layers 4,5,6,7 are capped with a conductor 8 which lies over and which is pressed down along the side edges of this structure and into contact with the first conductive layer 4 on  
25 either side of the structure. The conductor 8 therefore makes up not only the third conductive layer 8 but also the first and second conductive portions 10,11 along the side edges of the structure.

The ends of the flat cable 1 are terminated by standard surface mount technology SMT coaxial connectors or standard low insertion force connectors for connection to standard components, for example standard flat printed circuit boards. It is also possible, due to the flat cable structure, for an opening 20 to be  
5 formed through the layers of the cable 1, as shown in Figures 8 and 9, that exposes and provides access to the conductive layers 3,8, conductive regions 5 and/or the conductive portions 10,11, thereby creating a terminal arrangement in the form of a land pattern to which a connector can be bonded or indeed, to enable components such as a printed circuit board to be directly connected the  
10 flat cable 1, a feature which would be advantageous in an application with limited space.

Preferably, the opening or openings 20 creating a land pattern are formed through the insulative and/or conductive layers and/or portions by an etching  
15 process, thereby providing a terminal consisting of an exposed conductive surface of a conductive layer, region or portion. Alternatively, the opening or openings 20 are formed through the insulative and/or conductive layer, region and/or portion by mechanical drilling or any other suitable method.

20 The provision of the land pattern by the use of openings down to the conductive layers 3,8 and conductive region 5, is especially advantageous in view of the planar nature of the cable offering distinct advantages over a conventional circular section cable. The terminated cable in the form of a coaxial cable also provides a matched transmission system.

25

The material for the insulative layers is preferably a flexible polyamide or polyester having the required dielectric constant but for applications where no folding is required, more rigid materials can be used such as a glass fibre laminate, for example FR4 or any other suitable material.



A flat cable 1 is preferably constructed by consecutively stacking respective layers one on top of the other and adjacent one another. Layers in the cable structure are provided by chemical deposition, a mask and etch process or by  
5 producing a layer as a distinct element e.g. a length of foil. Other processes can be used which do not require layers to be stacked consecutively, for instance by preforming an insulated core comprising the conductive region 5 and its surrounding insulator and subsequently sandwiching that arrangement to produce a flat structure. Any other suitable construction methods may also be  
10 used to produce the flat cable structure.

The features disclosed in the foregoing description, or the following claims, or the accompanying drawings, expressed in their specific forms or in terms of a means for performing the disclosed function, or a method or process for  
15 attaining the disclosed result, as appropriate, may, separately, or in any combination of such features, be utilised for realising the invention in diverse forms thereof.

**CLAIMS:**

1. A flat flexible cable having an elongate composite structure comprising:  
an elongate region of conductive material;  
5 an insulative material surrounding the conductive material;  
first and second elongate flat conductors sandwiching the insulative  
material surrounding the elongate region of conductive material; and  
first and second elongate flat insulators on opposite sides of the first and  
second elongate flat conductors to the insulative material surrounding the  
10 conductive material, wherein the composite structure is itself flat and foldable  
without structural damage to the cable or its component parts.
2. A flat cable according to Claim 1, further comprising a first conductive  
portion electrically interconnecting the first and second conductors on one side  
15 of the structure and a second conductive portion electrically interconnecting the  
first and second conductors on the opposite side of the structure to provide a  
coaxial cable.
3. A flat cable according to Claim 2, wherein one of the first and second  
20 conductors and at least one of the first and second conductive portions  
comprise a single element.
4. A flat cable according to Claim 2, wherein the first and second  
conductors and the first and second conductive portions comprise a single  
25 element.
5. A flat cable according to Claim 3 or 4, wherein the single element is a  
conductive foil.

6. A flat cable according to any one of Claims 2 to 5, further comprising a first and a second insulative portion, positioned adjacent to the first and second conductive portions respectively, each insulative portion being in contact with the first and second flat insulators.

5

7. A flat cable according to Claim 6, wherein the first insulative layer and at least one of the first and second insulative portions comprise a single element.

10 8. A flat cable according to Claim 6, wherein one of a single insulative element comprises the first and second insulators and the first and second insulative portions.

9. A flat cable according to any preceding claim, wherein at least one of the  
15 flat conductors, the conductive region or portions is in the form of a foil.

10. A flat cable according to any one of Claims 1 to 8, wherein at least one of the flat conductors, the constructive region or portions is in the form of a mesh.

20

11. A flat cable according to any preceding claim, wherein the thickness of the insulative material between the conductive region and the respective flat conductors is along the length of the cable.

25 12. A flat cable according to any preceding claim, wherein the thickness of at least one of the first and second flat insulators is reduced at a preselected region along the cable.

13. A flat cable according to any preceding claim, further comprising at least one conductor intercalated within at least one of the first and second flat insulators and the first and second insulative portions.
- 5 14. A flat cable according to any preceding claim, further comprising at least one terminal consisting of a conductive surface of a flat conductor, conductive region or portion exposed by an opening through at least a portion of the cable structure.
- 10 15. A method of manufacturing a flat flexible cable having an elongate composite structure comprising:  
providing an elongate region of conductive material;  
forming a surround of insulative material around the conductive material;  
15 locating a first and a second flat conductor either side of the insulative material;  
providing a first and a second flat insulator on opposite sides of the first and second flat conductors to the insulative material surrounding the conductive material, wherein the composite structure is foldable without damage to the  
20 cable or its component parts.
16. A method of manufacturing a flat cable structure according to Claim 15, wherein at least some of the component parts are consecutively stacked one on top of the other.
- 25 17. A method of manufacturing a flat cable structure according to any one of Claims 15 to 16, wherein at least one of the component parts is provided by chemical deposition.

18. A method of manufacturing a flat cable structure according to any one of Claims 15 to 17, wherein an opening is provided through the cable structure to form a terminal consisting of an exposed surface of a flat conductor, a conductive portion, and/or the conductive material.

5

19. A method of manufacturing a flat cable structure according to Claim 18, wherein the opening is formed by an etching process or by mechanical drilling.

20. A flat cable substantially as hereinbefore described with reference to and  
10 as shown in the accompanying figures.

15

**ABSTRACT****“A Flat Flexible Cable”**

5

A flat flexible cable and method of making the same, the cable having an elongate composite structure comprising: an elongate region of conductive material; an insulative material surrounding the conductive material; first and second elongate flat conductors sandwiching the insulative material surrounding the elongate region of conductive material; and first and second elongate flat insulators on opposite sides of the first and second elongate flat conductors to the insulative material surrounding the conductive material, wherein the composite structure is itself flat and foldable without structural damage to the cable or its component parts.

15

20

[FIGURE 7]




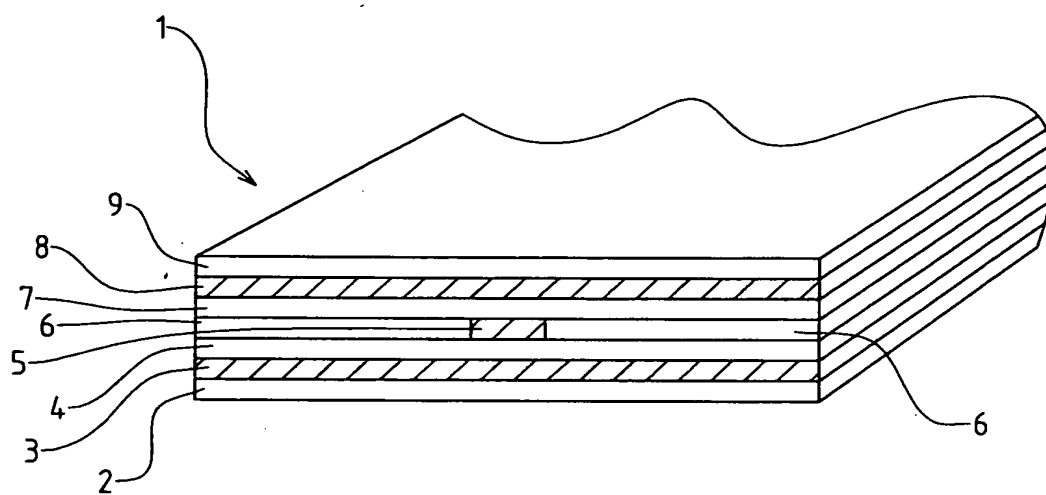





FIG 1

**THIS PAGE BLANK (USPTO)**

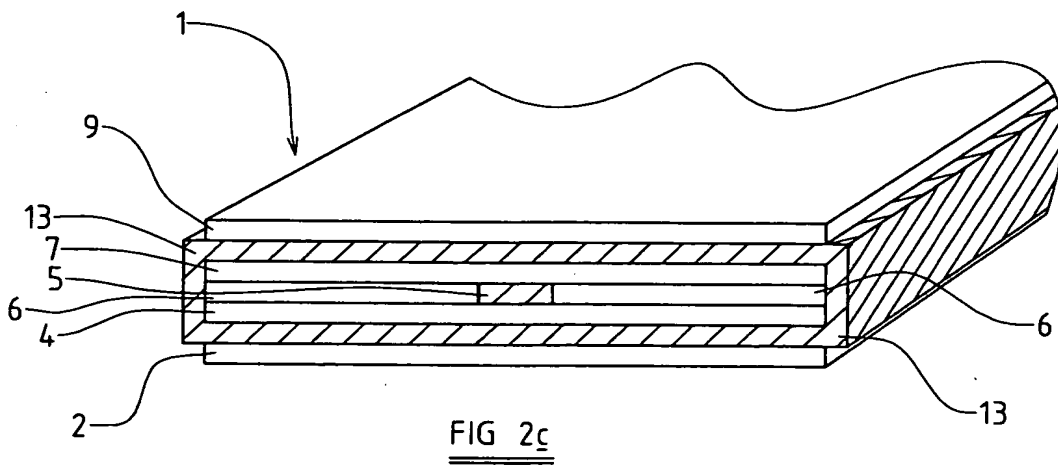
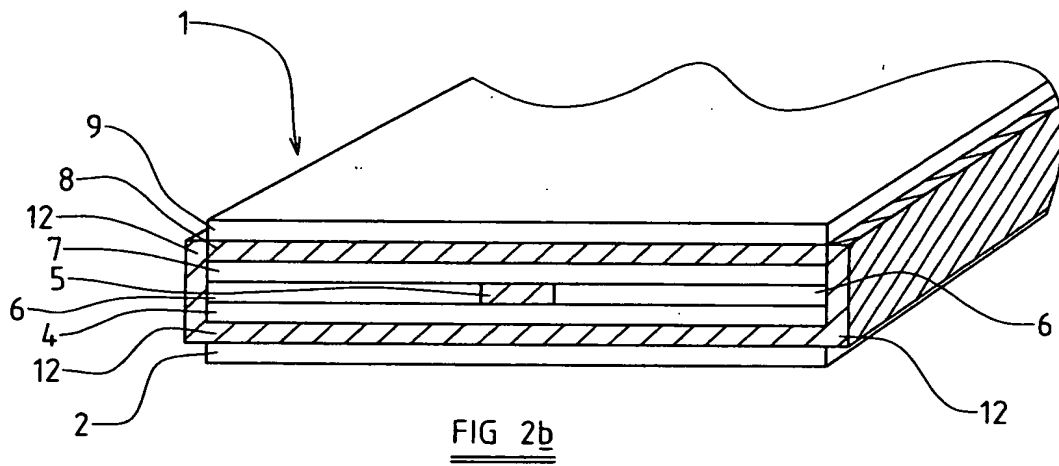


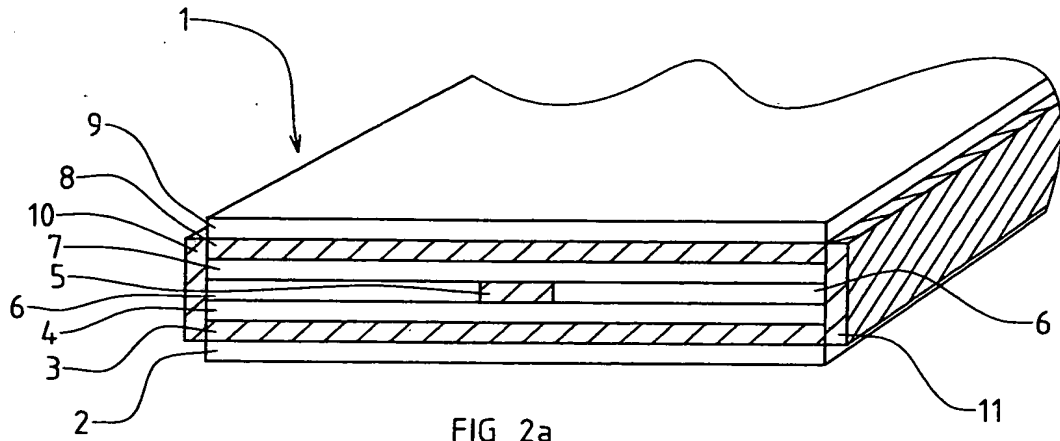

**THIS PAGE BLANK (USPTO)**

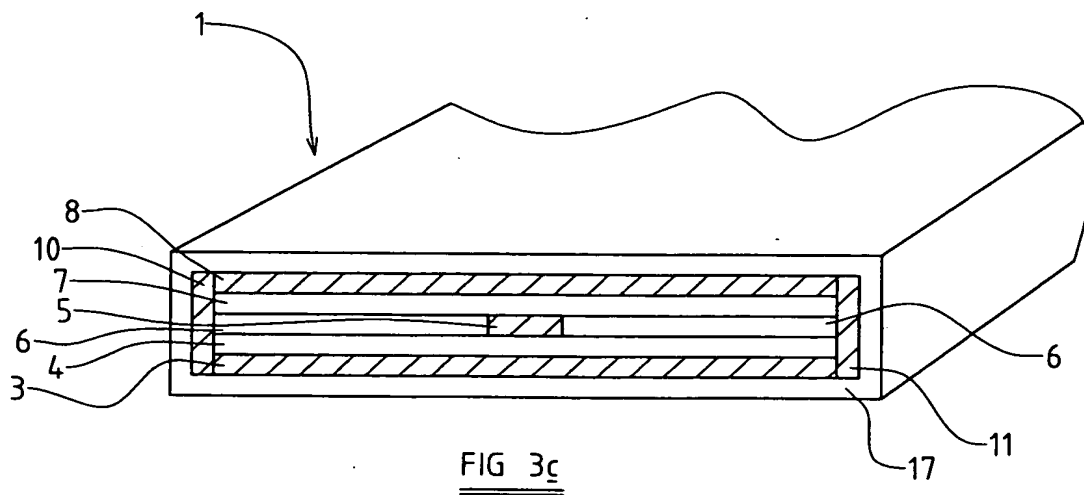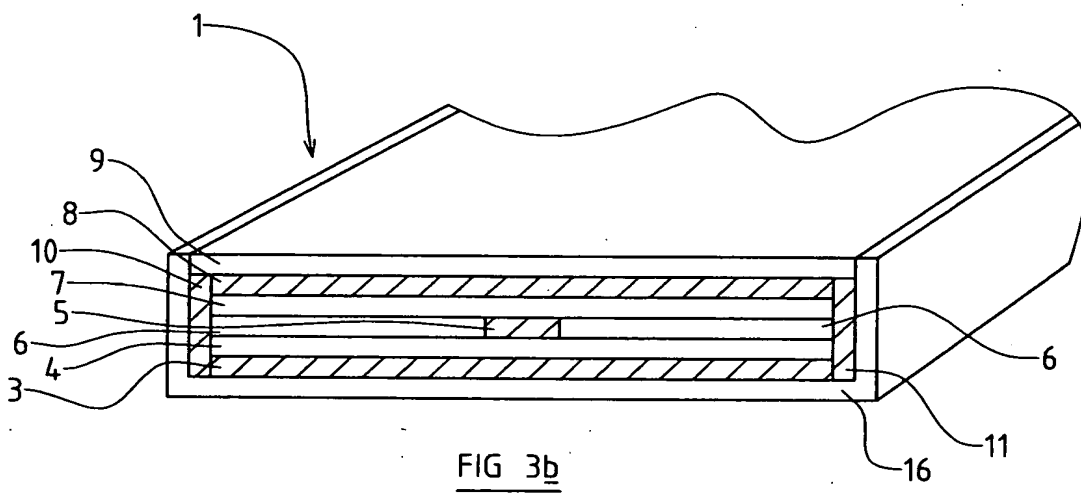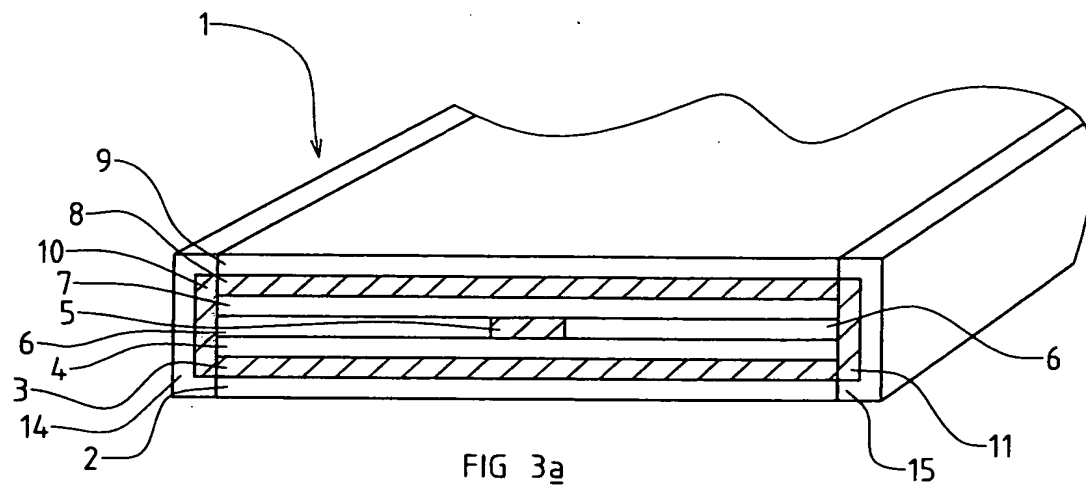

**THIS PAGE BLANK (USPTO)**

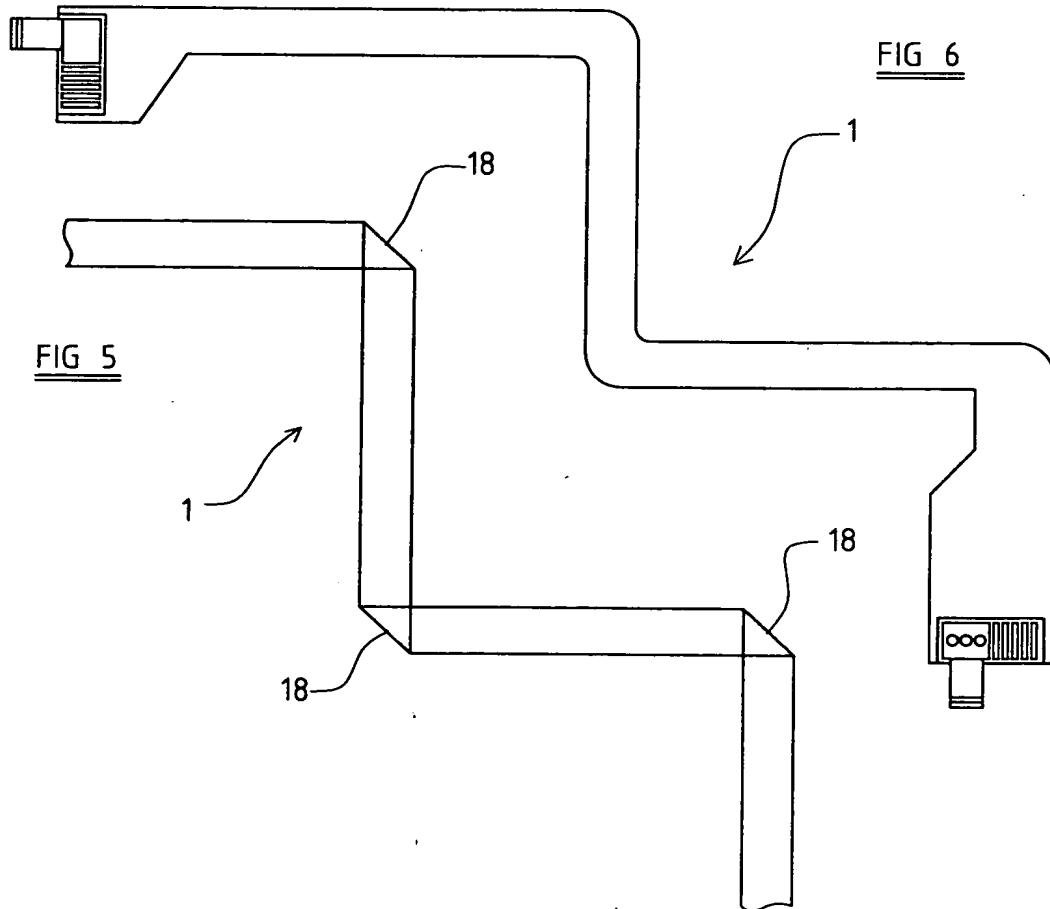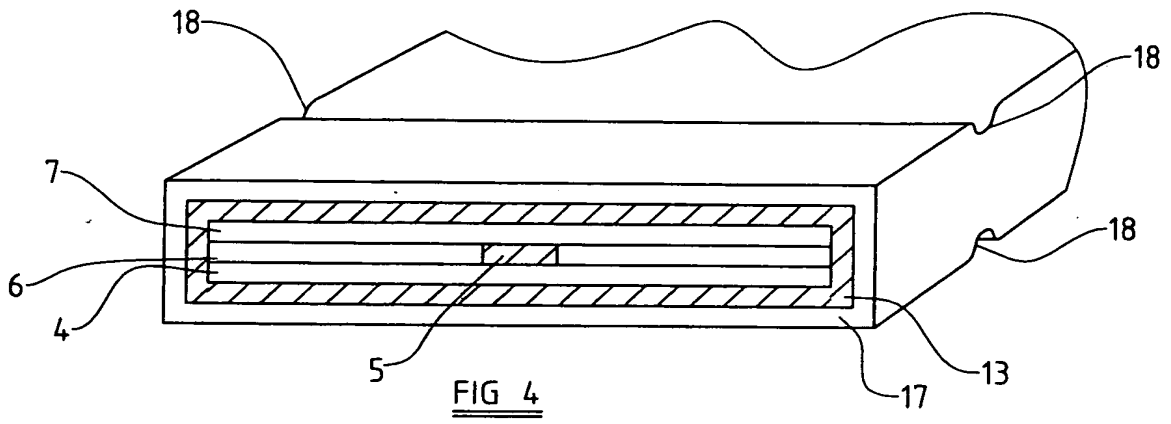

**THIS PAGE BLANK (USPTO)**

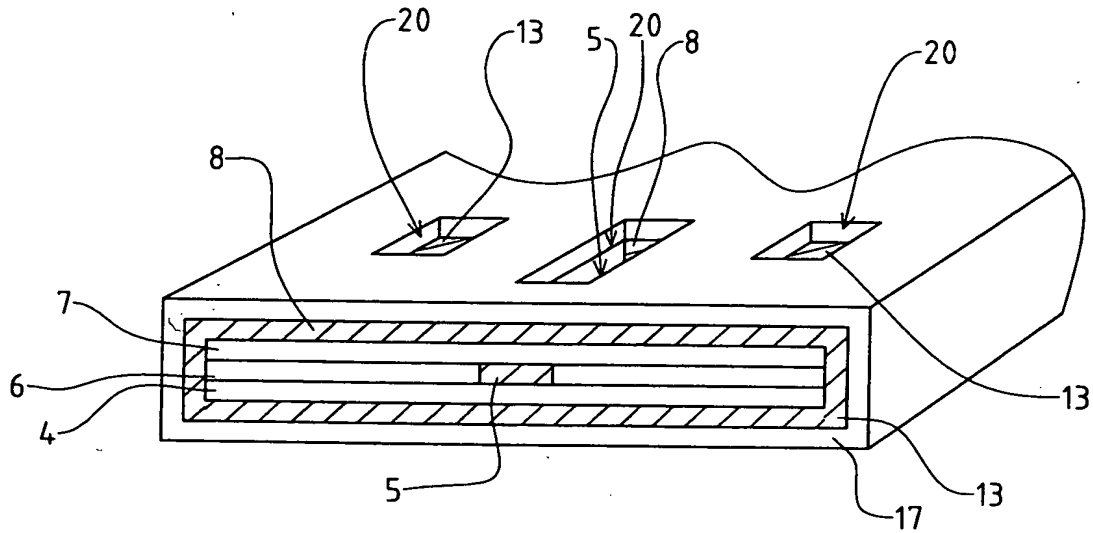


FIG 9

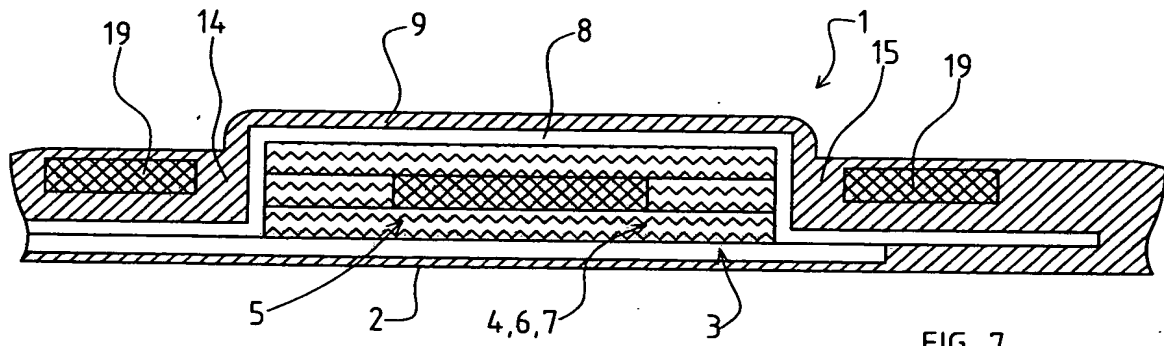


FIG 7

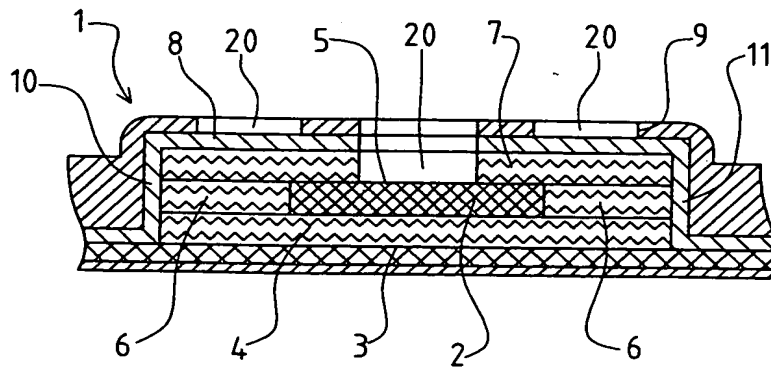


FIG 8

**THIS PAGE BLANK (USPTO)**